

VISI-GUARD™

High Visibility Safety Fabrics

Roll-up Traffic Control & Safety Sign Material



Product Properties	Test Method	Results
Base Fabric		9 x 9 1000 D
Weight		16 oz. /yd ²
Width	inches	36 & 48
Embossing		Polish
Put Up		As Requested
Tensile Strength	5100 (warp x fill)	220 x 210 ± 20 lbs/in
Tear Strength	5134 (warp x fill)	75 x 70 ± 10lbs/in
Adhesion	5970 (warp x fill)	18 x 18 ± 3 lbs./ 2 in
Hydrostatic Resistance	5512	300 PSI minimum


Disclaimer: Above values are average values, as tested in our laboratory. All productions are subject to variations. This information is not intended to be used as strict specifications. All data obtained in our laboratory is considered accurate, however, no warranty is expressed or implied.

High Visibility

•
Durable

•
Printable

•
ANSI/ISEA 107-2010
Compliant

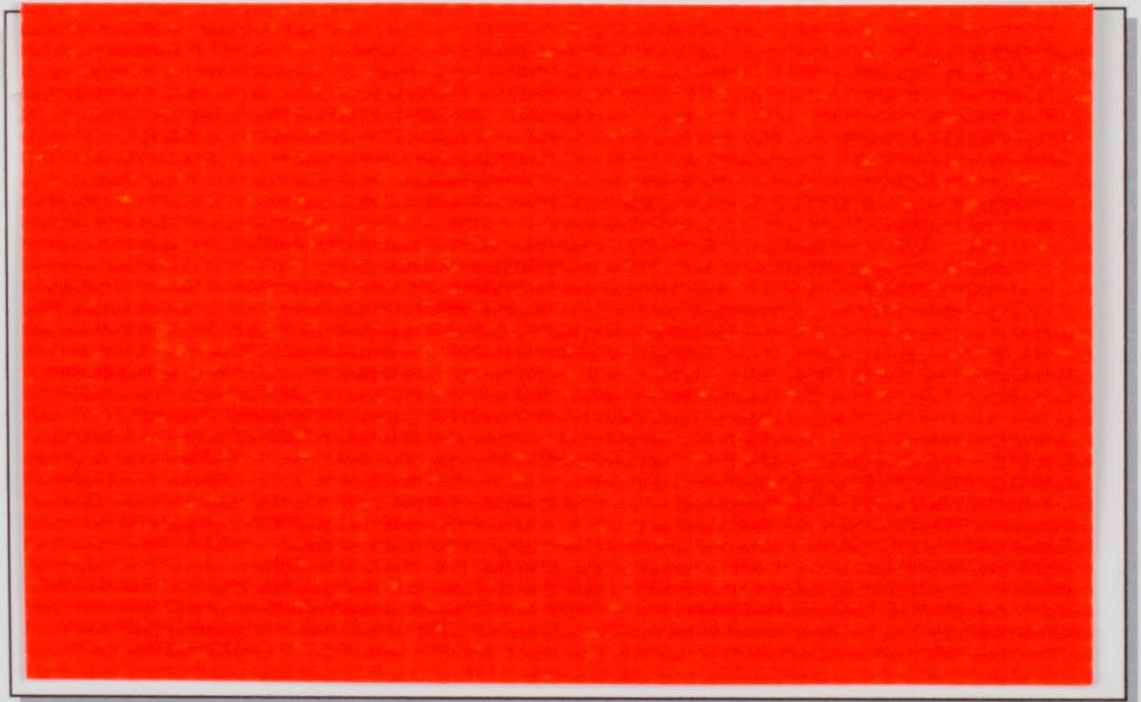

891661 - 48" / 891657 - 36"
Fluorescent Orange/Grey

Manufactured By:



PO Box 700, 61 Joslin Road, Glendale, RI 02826 USA
(401) 568-3081 • Toll-Free (800) 556-7764 • Fax (401) 568-0019
sales@bruinplastics.com • www.bruinplastics.com